

LSZH Cable

Halogen Free Copper Cable




First choice for quality

A cable designed by CQR to meet all aspects of the European Construction Product Regulation (CPR) EN50575.

This cable has been independently tested and certified by an accredited test facility and has been awarded a CPR Euro classification.

CQR offer the Installer, Specifier and End User a quality cabling solution and piece of mind that the product will perform to specification in the event of a fire.


DoP Certificates available online for download

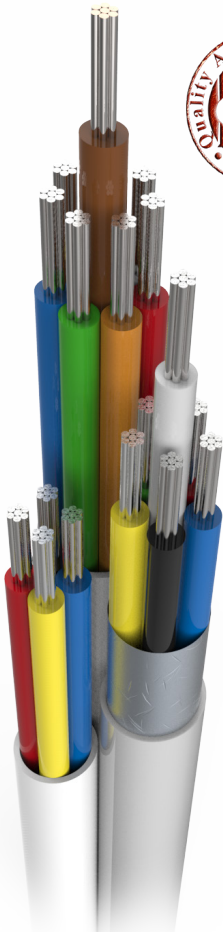

- Suitable for any installation where signal integrity is essential
- 7 x 0.182mm Tinned Copper
- Type 1 LSZH Jacket
- Screened or Unscreened
- Manufactured to BS4737-3.30:2015 Type 1
- Fully compliant with EN50575 'CPR'

Also available with a Low Smoke & Fume sheath BS4737-3.30:2015 Type 2
Also available with a PVC sheath BS4737-3.30:2015 Type 2

Available Cores

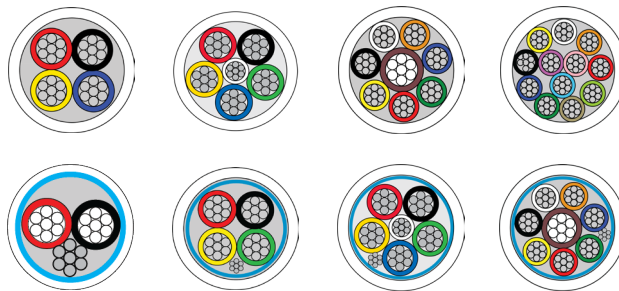

Product codes

Code	Description
CAB4HF/WH/100	4 Core LSZH Professional Cable
CAB6HF/WH/100	6 Core LSZH Professional Cable
CAB8HF/WH/100	8 Core LSZH Professional Cable
CAB12HF/WH/100	12 Core LSZH Professional Cable
CABS2HF/WH/100	2 Core Screened LSZH Professional Cable
CABS4HF/WH/100	4 Core Screened LSZH Professional Cable
CABS6HF/WH/100	6 Core Screened LSZH Professional Cable
CABS8HF/WH/100	8 Core Screened LSZH Professional Cable

Other cable lengths available
See www.cqr.co.uk for details

Technical data

Core:	7 x 0.182
Resistance:	94.6 Ohms/Km
AWG:	25
Conductor Material:	Tinned Copper
Conductor area:	0.182mm ²
Max voltage:	50 volts
Sheathing:	LSZH
Core insulation:	LSZH
Operating temp:	70°C
Euroclass Rating:	E _{ca}
SCREENED CABLE	
Drain wire:	Soft tinned copper
Screen:	Alu/Polyester Foil

Over 30 Years experience of alarm cable manufacturing in the United Kingdom

rev. 3-11/2020



www.cqr.co.uk

info@cqr.co.uk

Sales: +(0)151 606 1000 Tech: +(0)151 606 6311

CQR Security Ltd, 125 Pasture Road, Moreton, Wirral, CH46 4TH, UK

