

### AEMSF300 Mortice Shear Electro-Magnetic Lock

*The AEMSF300 mortice shear electro-magnetic lock offers a higher level of security, with a holding force up to 2000 lbs, achieved by a combination of magnetic holding force and interlocking pins.*

Simple to install and suitable for single or double swing, single or double doors.  
Fire tested to EN1634-1 for 30 or 60 minute single action timber fire doors.





#### Features & Benefits

- Fully concealed and can be fitted to timber or metal doors (with a minimum door thickness of 44mm)
- Holding force of up to 2000lbf / 8896N / 907kgf (dependant on installation details)
- Can be used horizontally in the transom or fitted vertically in the frame jamb
- Door and lock status monitoring
- CE marked
- Fixing kit available for glass door applications (AMS41SSM only)
- Black finish as standard
- Fire tested to EN1634-1 for 30 or 60 minute single action timber fire doors. (For fire rating please use intumescent pack **SIN-SHEAR-MAG**)
- Fire Test Report No. 341521 dated 29<sup>th</sup> August 2014 and Fire Assessment Report WF508181 dated 8<sup>th</sup> November 2021

## AEMSF300 Mortice Shear Electro-Magnetic Lock

Technical Information	
Holding Force	2000 lbs / 8896N
Security Level	High
Voltage	12-24V DC
Current A (12/24)	2.2/1.4
Finish	Zinc Plated
Operating Temp	-30°C to +50°C
Auto Relocking Timer	1-6 seconds (Adjustable )
Fire tested to	EN1634-1

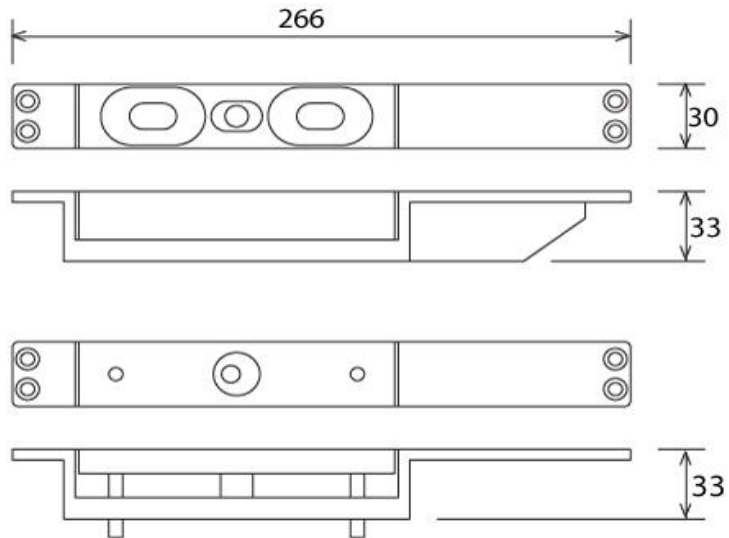

For further information contact:

**Securefast plc**  
 6, The Cedars Business Centre  
 Avon Road, Cannock  
 Staffordshire  
 WS11 1QJ



**Call** > +44 (0) 1704 502 801

**Email** > sales@securefast.co.uk

**Visit** > www.securefast.co.uk