

## AMG210 Series Mortice Electro-Magnetic Locks in Transom Housings (Grade 3)



AMG211/AT



***The AMG210 series mortice electro-magnets are designed to offer a clean line across the door transom head or down the side door frame with the magnet encased into the satin anodised aluminium housing.***

Securefast Transom Housing has a high holding force of a minimum of 850lb/f per magnet with different voltage options offering a sleek finish suitable for single or double outward door applications.

### Features & Benefits

- 12/24V DC (Adjustable)
- Continuous housings provide improved aesthetics for high quality installations
- Satin anodised aluminium finish
- Monitored Electro-Magnetic Lock
- CE marked
- Surface mounted and easy to install
- Can be fitted on header or side frame of the door opening
- Tested to TS 010 – Grade 3
- Actual holding force 4.5kN / 1011lbf / 459kgf
- Fire rated to EN1634-1 for FD30 and FD60 timber doors. – Report No. WF417165


Stock Code	Description
AMG211/AT	1M Transom Housing with a single Electro-Magnetic Lock (Monitored)
AMG215/AT	2M Transom Housing with two Electro- Magnetic Locks for Vertical Fixing (Monitored)

## AMG210 Series Mortice Electro-Magnetic Locks in Transom Housings (Grade 3)

AMG211/AT



AMG215/AT

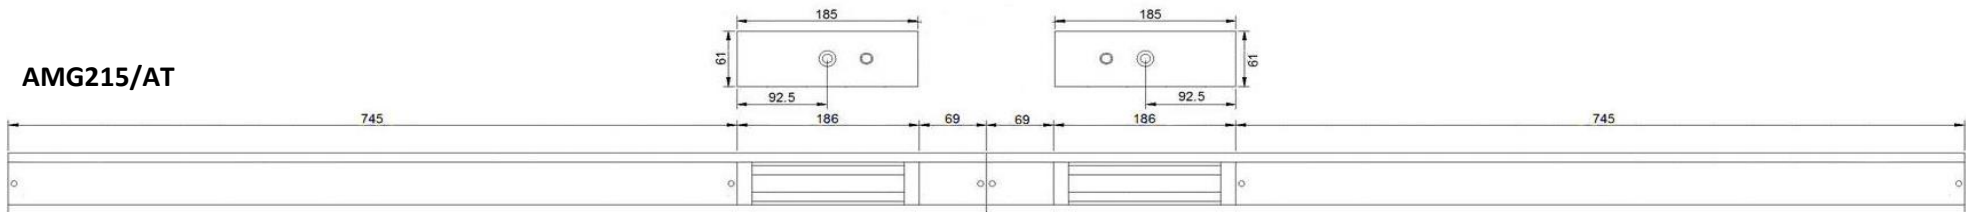

Stock Code	Current	Voltage (DC)	Dimension (mm) Armature Plate	Dimension (mm) Transom Housing
AMG211/AT	500mA	12/24V	185(L)x16(W)x61(H)	1000(L)x40(W)x67(H)
AMG215/AT	1A	12/24V	185(L)x16(W)x61(H)	2000(L)x40(W)x67(H)
Brackets				
AMH593/L1	1 Metre L Bracket			
AMH593/L2	2 Metre L Bracket			

For further information contact:

**Securefast plc**  
6, The Cedars Business Centre  
Avon Road, Cannock  
Staffordshire  
WS11 1QJ



Call > +44 (0) 1704 502 801

Email > sales@securefast.co.uk

Visit > www.securefast.co.uk