

ARD010 Range Roger Readers



ARD010-01

ARD010

The ARD010 and ARD010-1 slimline readers offer a compact and ascetically units in grey as proximity or proximity and card entry. They can be used with a simple standalone system or part of a network system.

These Mifare readers can read up to 6cm from the face, have tamper protection with a LED and buzzer controlled through separate inputs. They can be used both internal or externally and have the facility of an events log for 1024 transactions.


Features & Benefits

- Power Supply 12v DC
- 13.56 Mhz Mifare cards
- Programmable data output format#
- LED and buzzer controlled through separate inputs
- May be operated as an offline standalone access controller
- Up to 120 indexed users with card and/or PIN (standalone mode)
- Authentication : Card and/or PIN
- Event log for 1024 transaction
- Two NO/NC inputs
- Programmed manually or from a PC
- Tamper protection
- Average current consumption 85 mA for Proximity and PIN
- Average current consumption 65 mA for Proximity only
- Reader distance up to 6cm

Code	Description
ARD010-1	External Reader (Grey)
ARD010	External Reader with Keypad (Grey)

ARD010 Range Roger Readers

Technical Information	
Supply Voltage	10-15V DC
Current Consumption	85mA (65mA for version without keypad)
Anti-Sabotage Protection	NC contact, 50mA/24V, IP67
Reading Distance	Up to 6cm
Environmental Class	Class N, outdoor general, temperature: -25°C - +60°C, relative humidity: 10 to 95% (non condensing)
Dimensions H x W x D	With standard enclosure base 152.5 x 46 x 23mm
Weight	150g
Approvals	CE

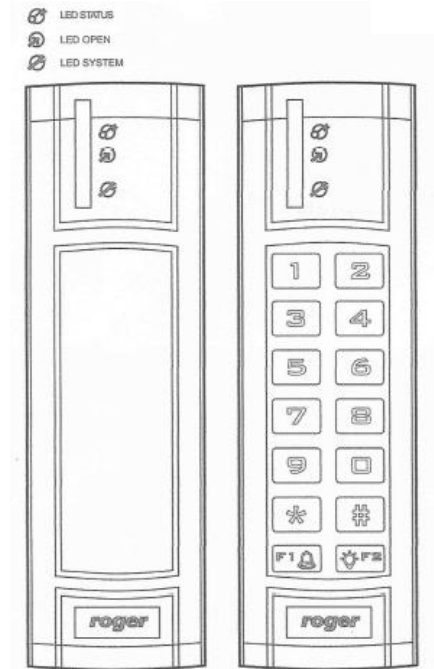

For further information contact:

Securefast plc
6, The Cedars Business Centre
Avon Road, Cannock
Staffordshire
WS11 1QJ



Call > +44 (0) 1704 502 801

Email > sales@securefast.co.uk

Visit > www.securefast.co.uk